


## 8 Standardteile

Bestell-Nr.	Nennmaße		Wand- dicke $s_3$	Breite B	Wellen- $\varnothing$ $D_J$	Gehäuse- $\varnothing$ $D_H$	Buchsen- innen- $\varnothing$ $D_{I,a}$	Lagerspiel $C_D$
	$D_I$	$D_O$	max. min.	max. min.	max. min.	max. min.	max. min.	max. min.
13560DU	135	140	2,465 2,415	60,50 59,50	135,000 134,937	140,040 140,000	135,210 135,070	0,273 0,070
13580DU				80,50 79,50				
14060DU	140	145		60,50 59,50	140,000 139,937	145,040 145,000	140,210 140,070	
140100DU				100,50 99,50				
15060DU	150	155		60,50 59,50	150,000 149,937	155,040 155,000	150,210 150,070	
15080DU				80,50 79,50				
150100DU				100,50 99,50				
16080DU	160	165		80,50 79,50	160,000 159,937	165,040 165,000	160,210 160,070	
160100DU								
180100DU	180	185		100,50 99,50	180,000 179,937	185,046 185,000	180,216 180,070	0,279 0,070
200100DU	200	205			200,000 199,928	205,046 205,000	200,216 200,070	0,288 0,070
210100DU	210	215			210,000 209,928	215,046 215,000	210,216 210,070	
220100DU	220	225			220,000 219,928	225,046 225,000	220,216 220,070	
250100DU	250	255			250,000 249,928	255,052 255,000	250,222 250,070	0,294 0,070
300100DU	300	305			300,000 299,919	305,052 305,000	300,222 300,070	0,303 0,070

### 8.2 DU-Bundbuchsen

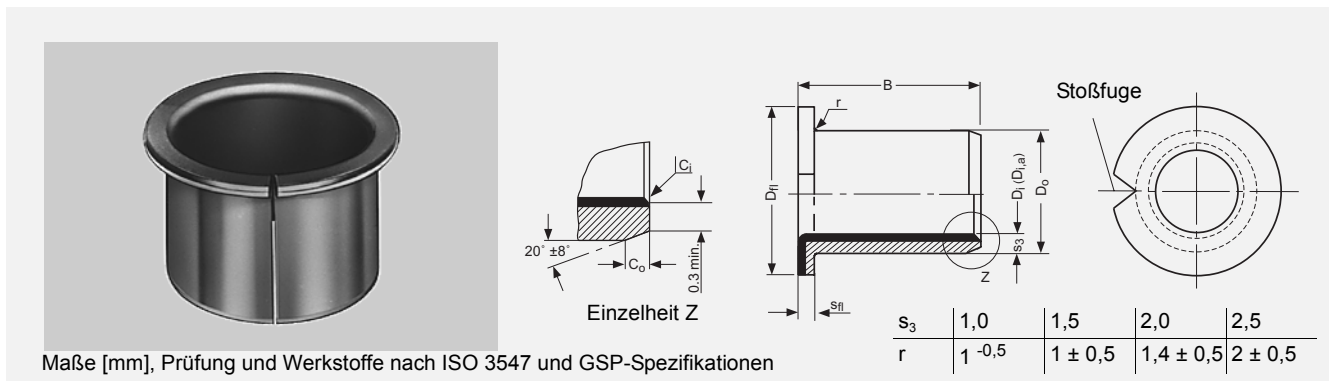

Alle Abmessungen in mm

Bestell-Nr.	Nenn- maße		Wand-dicke s <sub>3</sub>	Bund-dicke s <sub>fl</sub>	Bund- außen-∅ D <sub>fl</sub>	Breite B	Wellen-∅ D <sub>J</sub>	Gehäuse-∅ D <sub>H</sub>	Buchsen- innen-∅ D <sub>I,a</sub>	Lager- spiel C <sub>D</sub>
	D <sub>I</sub>	D <sub>O</sub>	max min.	max. min.	max. min.	max. min.	max. min.	max. min.	max. min.	max. min.
BB0304DU	3	4,5	0,750 0,730	0,800 0,700	7,500 6,500	4,25 3,75	3,000 2,994	4,508 4,500	3,048 3,000	0,054 0,000
BB0404DU	4	5,5			9,500 8,500		4,000 3,992	5,508 4,500	4,048 4,000	0,056 0,000
BB0505DU	5	7	1,005 0,980	1,050 0,950	10,500 9,500	5,25 4,75	4,990 4,978	7,015 7,000	5,055 4,990	0,077 0,000
BB0604DU	6	8	1,005 0,980	1,050 0,950	12,5 11,5	4,25 3,75	5,990 5,978	8,015 8,000	6,055 5,990	0,077 0,000
BB0608DU						8,25 7,75				
BB0806DU	8	10	1,005 0,980	1,050 0,950	15,5 14,5	5,75 5,25	7,987 7,972	10,015 10,000	8,055 7,990	0,083 0,003
BB0808DU						7,75 7,25				
BB0810DU						9,75 9,25				

Bestell-Nr.	Nenn- maße		Wand-dicke s <sub>3</sub>	Bund-dicke s <sub>fl</sub>	Bund- außen-∅ D <sub>fl</sub>	Breite B	Wellen-∅ D <sub>J</sub>	Gehäuse-∅ D <sub>H</sub>	Buchsen- innen-∅ D <sub>i,a</sub>	Lager- spiel C <sub>D</sub>
	D <sub>I</sub>	D <sub>O</sub>	max min.	max. min.	max. min.	max. min.	max. min.	max. min.	max. min.	max. min.
BB1007DU	10	12	1,005 0,980	1,050 0,950	18,5 17,5	7,25 6,75	9,987 9,972	12,018 12,000	10,058 9,990	0,086 0,003
BB1009DU						9,25 8,75				
BB1012DU						12,25 11,75				
BB1017DU						17,25 16,75				
BB1207DU	12	14			20,5 19,5	7,25 6,75	11,984 11,966	14,018 14,000	12,058 11,990	0,092 0,006
BB1209DU						9,25 8,75				
BB1212DU						12,25 11,75				
BB1217DU						17,25 16,75				
BB1412DU	14	16			22,5 21,5	12,25 11,75	13,984 13,966	16,018 16,000	14,058 13,990	
BB1417DU						17,25 16,75				
BB1509DU	15	17			23,5 22,5	9,25 8,75	14,984 14,966	17,018 17,000	15,058 14,990	
BB1512DU						12,25 11,75				
BB1517DU						17,25 16,75				
BB1612DU	16	18			24,5 23,5	12,25 11,75	15,984 15,966	18,018 18,000	16,058 15,990	
BB1617DU						17,25 16,75				
BB1812DU	18	20			26,5 25,5	12,25 11,75	17,984 17,966	20,021 20,000	18,061 17,990	0,095 0,006
BB1817DU						17,25 16,75				
BB1822DU						22,25 21,75				
BB2012DU	20	23	1,505 1,475	1,600 1,400	30,5 29,5	11,75 11,25	19,980 19,959	23,021 23,000	20,071 19,990	0,112 0,010
BB2017DU						16,75 16,25				
BB2022DU						21,75 21,25				
BB2512DU	25	28			35,5 34,5	11,75 11,25	24,980 24,959	28,021 28,000	25,071 24,990	
BB2517DU						16,75 16,25				
BB2522DU						21,75 21,25				
BB3016DU	30	34	2,005 1,970	2,100 1,900	42,5 41,5	16,25 15,75	29,980 29,959	34,025 34,000	30,085 29,990	0,126 0,010
BB3026DU						26,25 25,75				
BB3516DU	35	39			47,5 46,5	16,25 15,75	34,975 34,950	39,025 39,000	35,085 34,990	0,135 0,015
BB3526DU						26,25 25,75				
BB4016DU	40	44			53,5 52,5	16,25 15,75	39,975 39,950	44,025 44,000	40,085 39,990	
BB4026DU						26,25 25,75				
BB4516DU	45	50	2,505 2,460	2,600 2,400	58,5 57,5	16,25 15,75	44,975 44,950	50,025 50,000	45,105 44,990	0,155 0,015
BB4526DU						26,25 25,75				